

Note about device disassembling

Use a **thin** and **sharp** tool for opening the device cover. Insert it into the center of the terminal connector as shown in the photo below:

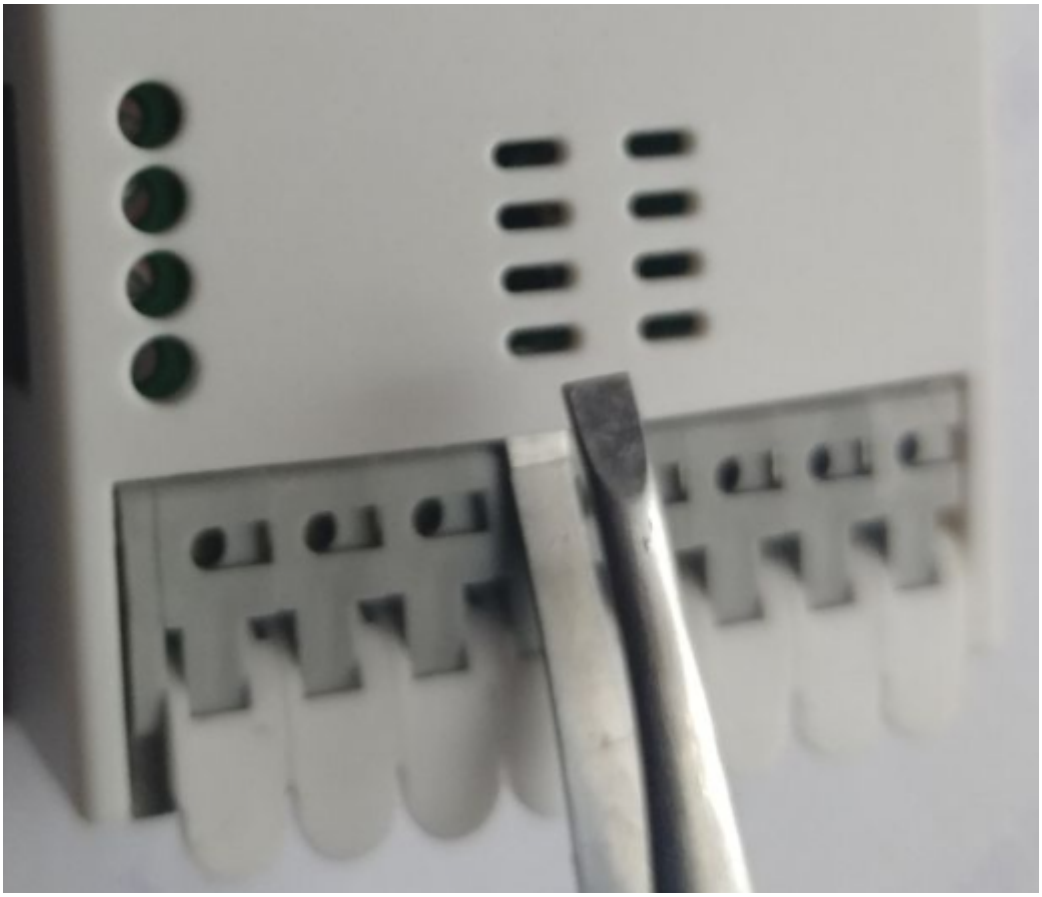

Once the tool is inserted, start pulling the PCB down from the Type-C connector side:

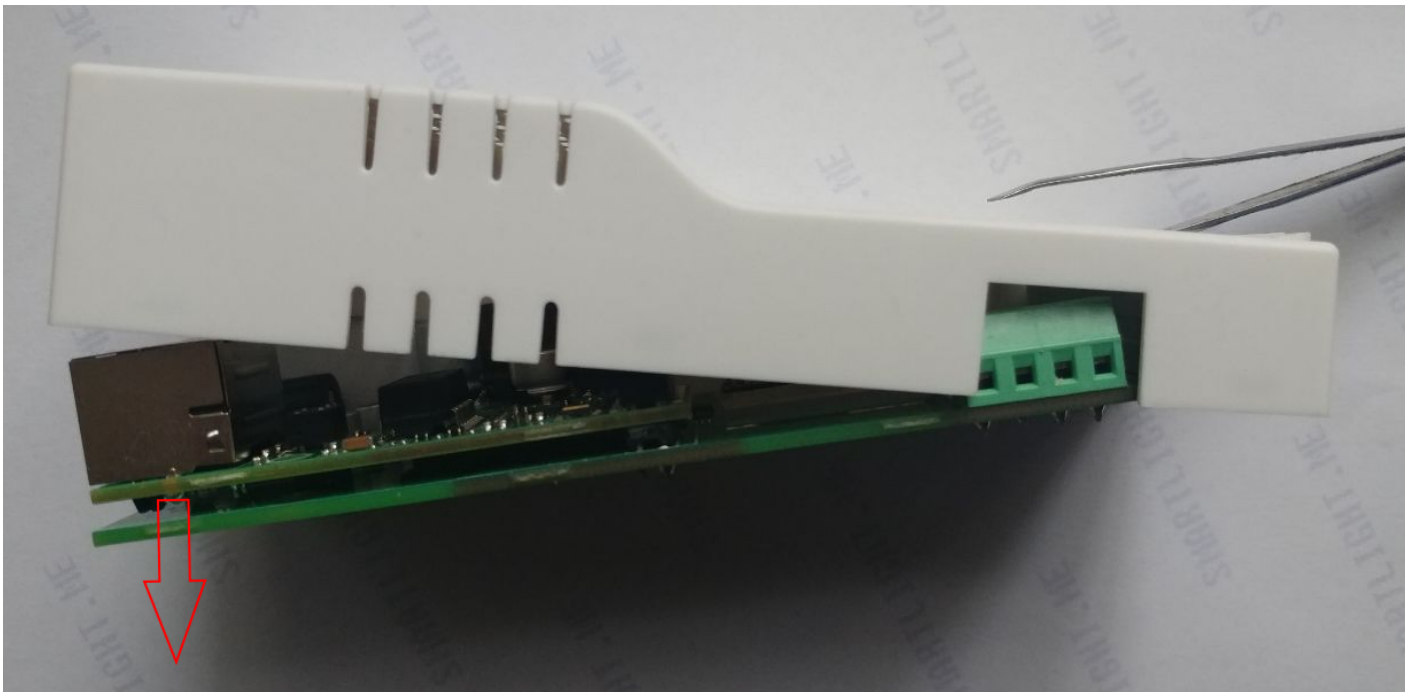

Revision #1
Created 2025-09-30 10:09:41 UTC by Taras
Updated 2025-09-30 10:16:45 UTC by Taras