

Troubleshooting

This section lists common issues that may occur during the installation or operation of SMHUB and their solutions.

IP Conflict When Using Multiple SMHUB Devices

Issue

If you have two (or more) SMHUB devices connected to the same network and both receive the **same IP address**, this is caused by a **MAC address conflict**.

Root Cause

In early SMHUB-OS versions, the MAC address was cached by the firmware during the initial flashing process and cache not cleared. As a result, multiple devices could end up using the **same MAC address**, causing network conflicts.

How to Fix

1. **Ensure SMHUB-OS version is at least 0.3.7**
2. **Ensure your SMHUB model** (e.g. SMHUB Essential, SMHUB Nano) is shown in the top-left corner of the web interface
 - If not, please fix that first:
<https://smlight.tech/support/manuals/books/smhubs/page/troubleshooting#bkmrk-smhub-nano-mg24-mode>
3. Open **Console**
4. Run the following command (recommended on both conflicting devices): `sudo fw_setenv ethaddr`
Password: `smlight`
5. **Reboot** the device
6. **Check the IP address** - each SMHUB should now have its own IP


Do this on both (or more) conflicting devices.

Result

Each SMHUB will generate a **unique MAC address**, eliminating IP conflicts on your network.


Power & Boot

The first batch of SMHUBs with 4G add-ons did not include the screw with a ring, which was meant to be placed between the add-on and the main PCB.

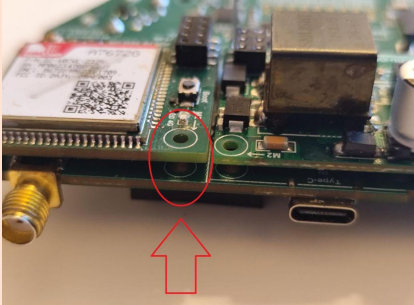

For some users, this caused a short circuit that prevented the hub from turning on. To fix this, follow the steps below:

1. Remove the 4G add-on
2. Stick insulating tape to the SIM card slot or place a layer of paper between the PCB and the 4G add-on

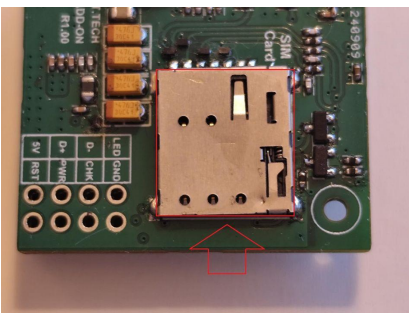

3. Install the 4G add-on

This section lists common issues that may occur during the installation or operation of SMHUB and their solutions.

Feedbacks from users

- **Issue:** ... nothing on the webUI is loading. the Settings page stays completely blank, doesn't matter which setting I choose.
Resolution: And I have to admit, the problem was not the hub, it was me - Firefox & AdBlock will break the UI, at least in my case.
-

Device bricked with SMHUB-OS v2.x

Some users experienced a "soft bricked" device after updating over any method (Type-C / SD-Card or through the web UI). This issue appeared because of U-Boot changes introduced in version **0.2.0**, when the Robust Auto-Update Controller ("**RAUC**") was introduced. Users who experienced that were able to recover their "bricked" device by flashing back **0.1.2** via Type-C (because it did not contain the new RAUC changes [by the way, it is here [smhub-os-v0.1.2](#)]) and then updating directly to a **0.3.x** version via Type-C.

Below is a simple explanation of what happened and how it was fixed.

When the device turns on, the very first piece of software that runs is called **U-Boot**. You can think of it like the "**starter**" or **boot manager** of the device. Before anything else loads, U-Boot reads some **settings** (called "environment variables") from the internal storage (the MMC). These settings tell it *how to start the system*.

At some point, **RAUC** (stands for "Robust Auto-Update Controller" - **the Linux update system on SMHUB**) accidentally **damaged/corrupted those settings**. When U-Boot tried to read them, it got confused and didn't know how to continue booting properly, and the device failed to boot - which looked like it was "bricked." (for regular start, or for Type-C/SD-Card updates).

What Was Changed:

To prevent this from ever happening again, we made two fixes:

1. **Automatically reset U-Boot's settings** whenever they are detected as corrupted. In simple terms: If U-Boot sees that its configuration is broken, instead of crashing or getting stuck, it will throw away the bad settings and restore working default settings - before any damage happens.
2. We also corrected how RAUC marks a software update as "successful." It will now only do that **after an update actually happens**, instead of doing it on **every boot**. The old behavior is likely what caused the corruption.

Simple Analogy:

- Imagine a PC that reads its BIOS settings when it powers on.
- If the BIOS settings get corrupted, the PC might not start.
- The fix is to detect the bad BIOS settings and **automatically reset to "factory defaults"** so the computer can continue to boot normally.

This is exactly what we are doing here, but for an embedded device.

The good news: starting from SMHUB-OS **v0.3.2**, the fix is now built-in. You can simply update and recover your device via Type-C / SD-Card.

(See details below <https://smlight.tech/support/manuals/books/smhub/page/smhub-os->

[release-notes#bkmrk-smhub-services-v0.1.-1](#))

Your device is now:

- **More robust**
- **Self-recovering**
- **Protected** from this type of failure in the future

Zigbee2MQTT

z2m: Error: [BACKUP] Current backup file is not for EmberZNet stack.

“ This means that you have previously run Z2M for Radio1 (CC26XX). Unfortunately Z2M does not support restoring backups between CC and EFR Zigbee chips, so to run Z2M for EFR radio you will have to delete the backup, which means you will have to re-pair all Zigbee devices.

Following the steps below means you will have to re-pair your Zigbee devices.


Hint: You can press the [TAB] key to autocomplete paths/file names.

1. Open console

 **Console**

2. Type: `cd /opt/zigbee2mqtt/data`
3. (optional) Type: `ls` to show filelist
4. Type `rm coordinator_backup.json`
5. (optional) Type: `ls` to show updated filelist

6. Go to "Apps" -> "Zigbee2MQTT" and press "Run" button

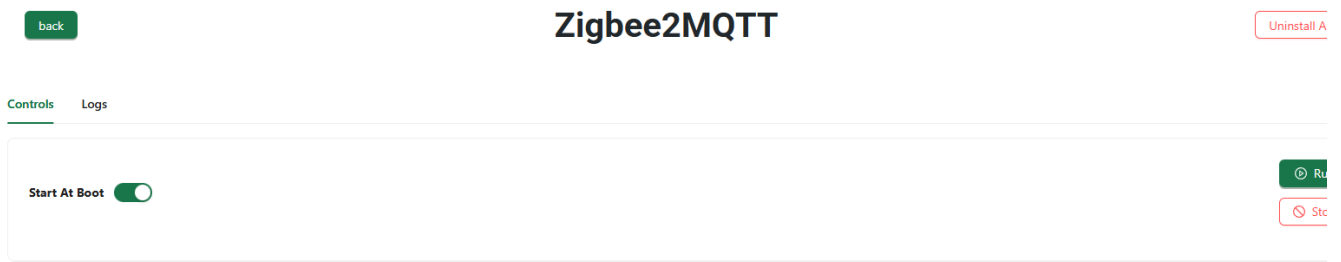

7. Now you can go to the Z2M interface, it will launch soon

Screenshot with a list of commands:

✓ Connected

```
Welcome to SMHUB-OS Web Terminal
smlight@SMHUB:~$ cd /opt/zigbee2mqtt/data
smlight@SMHUB:/opt/zigbee2mqtt/data$ ls
configuration.example.yaml    database.db
configuration.yaml           migration-1-to-2.log
configuration_backup_v1.yaml  migration-2-to-3.log
configuration_backup_v2.yaml  migration-3-to-4.log
configuration_backup_v3.yaml  state.json
coordinator_backup.json
smlight@SMHUB:/opt/zigbee2mqtt/data$ rm coordinator_backup.json
smlight@SMHUB:/opt/zigbee2mqtt/data$ ls
configuration.example.yaml    database.db
configuration.yaml           migration-1-to-2.log
configuration_backup_v1.yaml  migration-2-to-3.log
configuration_backup_v2.yaml  migration-3-to-4.log
configuration_backup_v3.yaml  state.json
smlight@SMHUB:/opt/zigbee2mqtt/data$ █
```

SMHUB Nano Mg24 model ID and radio flashing not-accessible

Model ID is not identifiable and Radio updates do not work properly.

SMHUB
Undefined

Dashboard
Zigbee2MQTT
Matterbridge
Node-RED
Z-Wave JS
Apps
Console
Settings
Under dev

Settings

- Authorization
- General
- Ethernet
- Wi-Fi
- Usb
- LTE/4G Add...
- MQTT
- Radios
- Updates an...
- WireGuard

OS Updates and Backups

- OS Update Channel: stable
- Auto Update:
- App Update Channel: stable

save

OTA Update

To fix this, please

1. Go to Console and execute this command: ``sudo bash /usr/lib/eeprom/eeprom-lib.sh --model nanomg24 --hw 0.97 --force`` (password for sudo is smlight). IMPORTANT: option `--hw 0.97` relates to hardware revision. You can see it on the PCB.
2. Reboot and check. It should work
3. Please also update OS, smhub-services, and smhubos to the latest versions afterwards.
4. Please check that LOG level in Zigbee2MQTT settings is set to INFO or WARNING; the level DEBUG overspams the device.

Revision #16

Created 8 September 2025 17:05:36 by Support3

Updated 19 January 2026 14:40:23 by Support3