

FAQ and troubleshooting

FAQ

I switched the device to router mode but it did not appear in Zigbee2MQTT / ZHA

The device in router mode only forwards ZigBee traffic over the ZigBee network, so it must be paired over the air just like any other ZigBee device. Of course, the device must be within range of your ZigBee network to work after pairing. Unfortunately, the network does not extend over Ethernet.

To start the pairing procedure, go to "Settings and Tools" -> "General settings" and click on the "Router reconnect" button. Your Zigbee network must be open for the device to pair.


How to reset SLZB device to factory settings?

For U devices and Ultima - reflash the device via USB using this tool

<https://smlight.tech/flasher/#SLZB-06U-MRxU>

Video guide for devices before the U series https://youtu.be/ps-x_-CQXp0?t=139

Location of radio modules for MR coordinators

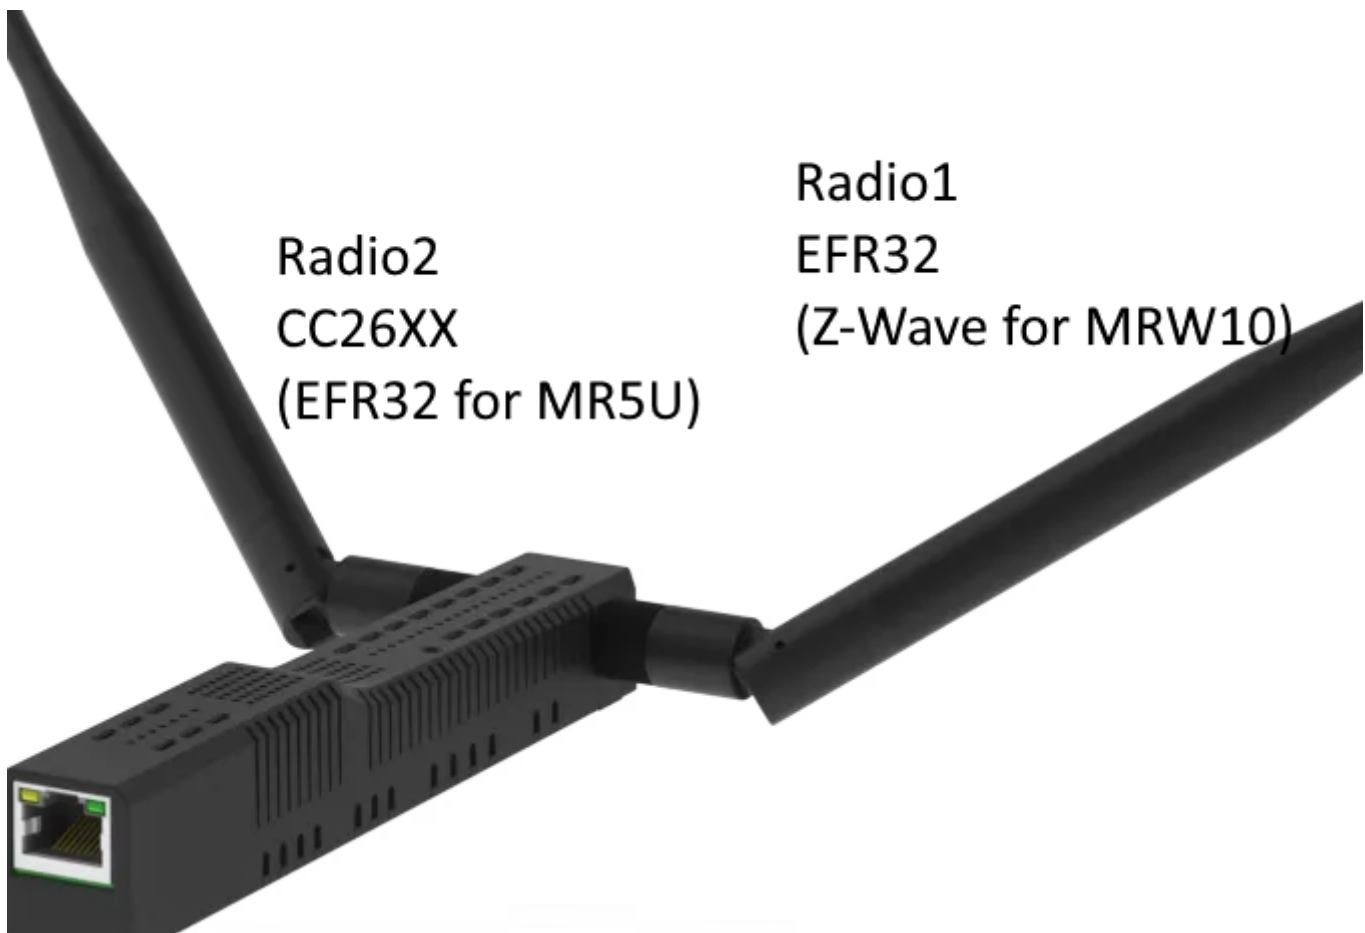

My device shows a temperature of X degrees, is this normal?


Temperatures up to 75 degrees are normal.

From 75 to 90 you should pay attention to ventilation and ambient temperature!

What is the best channel for a Zigbee network?

According to this [article by Metageek](#) the best is to use channel 15 for Zigbee and channels 1,6 and 11 for your home WiFi networks.

2.4 GHz ZigBee Channels

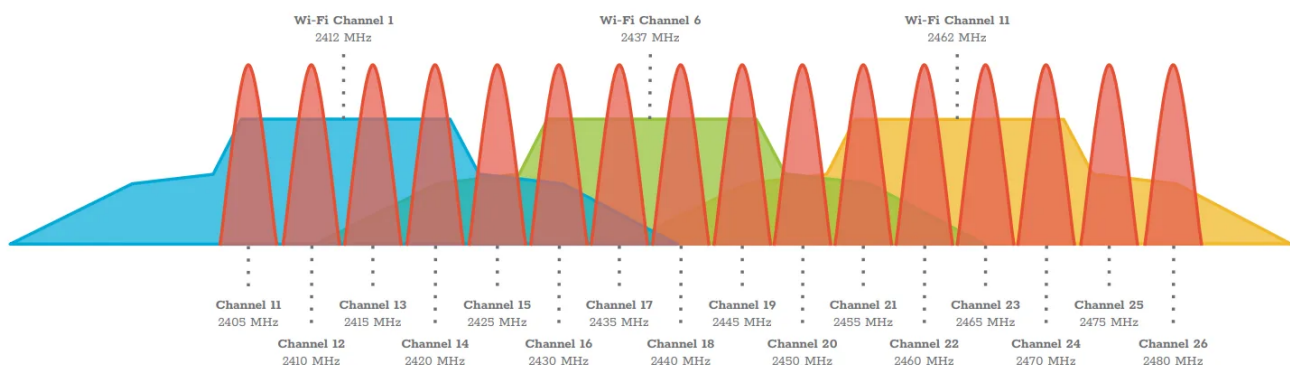

Does SLZB coordinators webserver support HTTPS?

No, HTTPS is not supported.

We are looking into HTTPS support on the U series but there is no ETA for this at this time.

I can't find the Transparent 802.1D WiFi bridge option

Starting with OS **3.2.6.dev0** this option is not available on U devices. Please use older firmware if you need this option.

Troubleshooting

Coordinator is restarting with reason "TASK_WDT"

Known problematic devices spamming the network with mDNS requests:

- Amino Aria
- Sonos

Reason: coordinator network interface is receiving too much multicast traffic and the CPU power is not enough to handle it.

Most likely, your network has a misconfigured video/IP TV stream or broken mDNS devices.

Possible solution: disable mDNS on the "Network" page.

Disabling mDNS is incompatible with OTBR!

REQ error: http_code -1

Your coordinator is not connected to the Internet.

Possible reasons:

- DNS servers or network gateway are incorrectly configured.
- blocking on the side of your router/provider of access to our update servers in Ukraine

warning: zh:ember:uart:ash: Frame(s) in progress cancelled

The problem is that Home Assistant automatically offers to install ZHA when it detects a SLZB device on the network. If you have agreed and installed ZHA and then try to run Z2M, you will get this error.

Please make sure that ZHA is not installed

Data request failed with error: 'MAC channel access failure' (225)

This error occurs when the coordinator is close to another radio wave source (e.g. WiFi router, microwave, etc.).

To fix this you need to move the coordinator away from the radio wave sources. Sometimes a distance of a few meters is not enough, if the error still occurs then move the coordinator outside the coverage area of your WiFi router.

I switched from conbee/efr32 to SLZB-06/p7/p10 and now LQI is lower

The difference in LQI between different manufacturers of ZigBee chips is a typical situation. Unfortunately, LQI is not a standardized parameter, so each manufacturer calculates it in their own way. LQI in conbee and efr32 is always greater than in cc2652x, even with the same RSSI. Therefore, LQI is a conditional parameter that may not reflect the real situation.

The second factor that affects LQI is the location of the coordinator. If the USB coordinator was in one location, but after migration you placed the network coordinator in another location, this will affect the LQI of some devices, since they will be further from the coordinator, the best option in this case is to re-pair these devices.

Current backup file is not for EmberZNet stack

If you see the error "Current backup file is not for EmberZNet stack" it means that your previous backup was for an adapter on the CC2652x chip.

Please take look at this guide for migrating between zstack/ember

<https://github.com/Koenkk/zigbee2mqtt/discussions/26716>

I wrote a custom IEEE address to my coordinator, is there a way to get its original IEEE address?

Yes! Just write IEEE **0xFFFFFFFFFFFFFFFF**

What ports/addresses does the coordinator use?

Ports:

80 - device web interface

81 - SSE

5050 - SLZB BLE proxy

6638 - zigbee chip socket

7638 - zigbee chip socket for Radio 2 (for MRx devices)

8638 - USB to Ethernet passthrough mode

9638 - zigbee chip socket for Radio3 (for Ultima3 Z-Wave addon)

URL:

google.com - device sends DNS request to check internet

updates.smlight.tech - device and zigbee module firmware updates

stats.smlight.tech - used to send feedback via device web interface and send telemetry (if active in settings)

Error: network commissioning timed out - most likely network with the same panId or extendedPanId already exists nearby Error: AREQ - ZDO - stateChangeInd after 60000ms

You need to update `pan_id` in both `zigbee2mqtt/configuration.yaml` and `zigbee2mqtt/coordinator_backup.json`. Note that the values need to match, but in `configuration.yaml` the value is encoded decimal, while in `coordinator_backup.json` the value is encoded **hexadecimal**. You can use a tool to convert.

Here's the steps:

- Make sure Z2M is stopped.
- **Make backup of database.db and coordinator_backup.json**
- **Note the existing `pan_id` values (both hexadecimal and decimal)**
- Change the value to something different. Make sure to use the same value in both files, but encode it decimal in the configuration and hexadecimal in the coordinator backup. (I just added 1 to the original value for simplicity.)
- Start Z2M.
- When Z2M has finished booting, stop it again.
- Change the `pan_id` back to the **original values** in both files.
- Start Z2M again.

If you have empty devices list or devices offline:

1. Make sure Z2M is stopped.
2. Restore original **database.db** and **coordinator_backup.json**
3. Start Z2M again.

Revision #2

Created 27 July 2026 08:34:02 by Taras

Updated 27 July 2026 10:54:09 by Taras